


OUTDOOR LIGHTING

# SMART EVO FLEX TONE 5

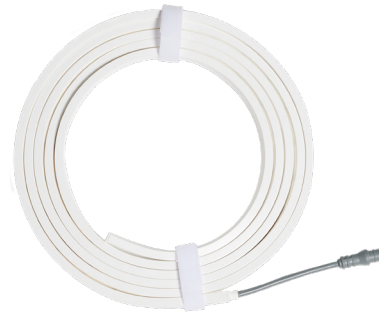

## GENERAL

SMART EVO FLEX 5 TONE  
Article number:  
SMART EVO FLEX 5 TONE \_\_\_\_\_ 10250420  
SMART DRIVER 1 TONE \_\_\_\_\_ 10250340  
Category \_\_\_\_\_ Surface Light  
Light source \_\_\_\_\_ LED  
Warranty \_\_\_\_\_ 5 years


## DIMENSIONS

Length \_\_\_\_\_ 3000 mm / 118.11"  
Width \_\_\_\_\_ 6,5 mm / 0.26"  
Height \_\_\_\_\_ 12 mm / 0.47"  
Diameter \_\_\_\_\_ -  
Total height \_\_\_\_\_ -  
Recess depth \_\_\_\_\_ -

## ELECTRONICS

Voltage \_\_\_\_\_ 12V AC  
Output \_\_\_\_\_ 10.00 Watt  
VA \_\_\_\_\_ 14.50  
Power factor \_\_\_\_\_ 0.60  
Light source \_\_\_\_\_ RGB  
Lifetime \_\_\_\_\_ 25000 hours  
Energy label \_\_\_\_\_ G  
Dimmable \_\_\_\_\_ yes

Length of cable lead:  
Complete length DRIVER incl. cable \_\_\_\_\_ 920 mm  
From DRIVER to EASY-LOCK \_\_\_\_\_ 720 mm  
From DRIVER to MINI CONNECTOR \_\_\_\_\_ 110 mm  
From EVO FLEX to MINI CONNECTOR \_\_\_\_\_ 110 mm

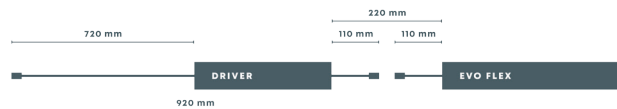

## LIGHT SPECIFICATIONS

Color temperature \_\_\_\_\_ 3100 K  
CRI (RA) \_\_\_\_\_ -  
Luminous intensity \_\_\_\_\_ 57.70 Cd  
Light beam 0-180 \_\_\_\_\_ 125°  
Light beam 90-270 \_\_\_\_\_ 125°  
Net luminous flux \_\_\_\_\_ 180 lumen  
Luminous efficiency \_\_\_\_\_ 18 lumenwatt

## MATERIAL

Ring Plate \_\_\_\_\_ -  
Lens \_\_\_\_\_ -  
Exterior \_\_\_\_\_ PU  
Easy Lock \_\_\_\_\_ included  
Water resistant \_\_\_\_\_ yes


## AVAILABLE PRODUCT COLORS

## AVAILABLE ACCESSORIES

EVO FLEX PROFILE, EVO FLEX CLIPS, EVO FLEX CORNER OUTSIDE, EVO FLEX CORNER INSIDE, SMART-EXT CORD TONE 1, EVO FLEX PROFILE SINGLE, EVO FLEX SPIKE

## PROTECTION RATING

IP : 68

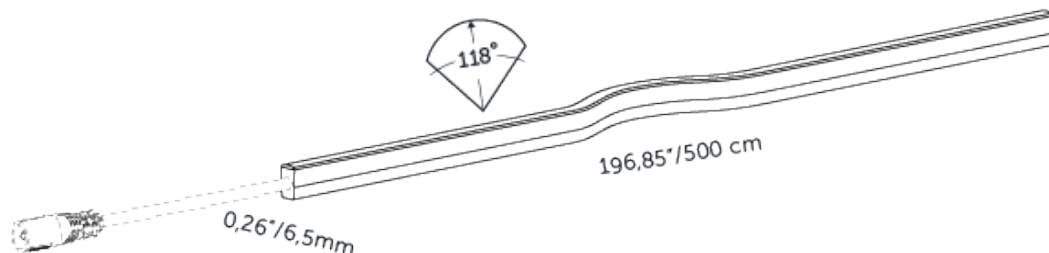


in-lite®

**ILLUMINANCE - CONE OF LIGHT**

CENTER BEAM (FC)	BEAM DIAMETER (FT)	DISTANCE (FT)
25	5,76	1,5
9	9,60	2,5
5	13,45	3,5
3	17,29	4,5
2	21,13	5,5
1	24,97	6,5

Beam angle (0-180°) (90-270°): 125°  
 edge illuminance is 1/2 of Centre beam

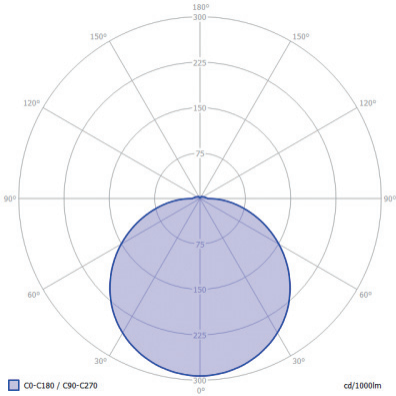

12 VOLT



**in-lite®**